


Алматы (7273)495-231
 Ангарск (3955)60-70-56
 Архангельск (8182)63-90-72
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Владикавказ (8672)28-90-48
 Владимир (4922)49-43-18
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48

Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Коломна (4966)23-41-49
 Кострома (4942)77-07-48
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Курган (3522)50-90-47
 Липецк (4742)52-20-81
 Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Ноябрьск (3496)41-32-12
 Новосибирск (383)227-86-73
 Киргизия (996)312-96-26-47

Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Петрозаводск (8142)55-98-37
 Псков (8112)59-10-37
 Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Саранск (8342)22-96-24
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Россия (495)268-04-70

Сыктывкар (8212)25-95-17
 Тамбов (4752)50-40-97
 Тверь (4822)63-31-35
 Тольятти (8482)63-91-07
 Томск (3822)98-41-53
 Тула (4872)33-79-87
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Улан-Удэ (3012)59-97-51
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Чебоксары (8352)28-53-07
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Чита (3022)38-34-83
 Якутск (4112)23-90-97
 Ярославль (4852)69-52-93
 Казахстан (772)734-952-31

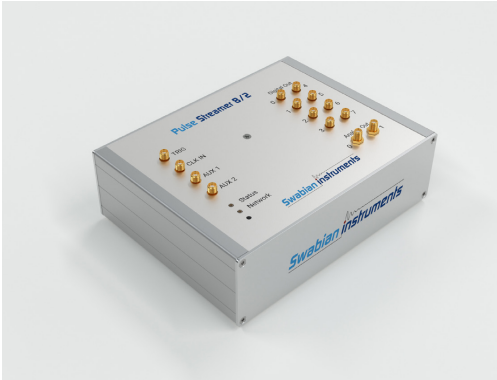

PULSE STREAMER 8/2

Synchronous digital pattern generator and arbitrary waveform generator

The Pulse Streamer 8/2 is a synchronous digital pattern and arbitrary waveform generator with 8 digital and 2 analog output channels. Its versatile user interface allows you to define complex pulse sequences and arbitrary waveforms efficiently.

Implement your ideas within minutes

An intuitive encoding lets you design digital patterns and analog waveforms of any complexity within minutes. Instead of just sample points, it allows you to define segments.

Stick to your favorite programming language

Control your experiment in your preferred programming language with our included native software libraries covering Python, Matlab, and LabVIEW.

1 GSa/s
digital
sampling rate

125 MSa/s
analog
sampling rate

1 M pulses
pattern memory

Be synchronous to start with

The Pulse Streamer's digital and analog outputs are always synchronous. Skip all efforts with synchronization across distinct hardware. Instead, output precisely timed synchronous digital and analog signals right away.

Set your Pulse Streamer anywhere in your lab

You talk to your Pulse Streamer via Ethernet. Set it anywhere in your lab and use it from anywhere.

Segments instead of sample points

Work with segments instead of sample points to describe complex digital patterns intuitively and efficiently.

Low-latency trigger input

Start pulse sequences with a low latency external trigger.

Reference or sampling clock input


Synchronize your output signals to external hardware.

1 Gbit/s network

Upload and run your patterns and waveforms within milliseconds.

512 MB internal memory and 3 repetition modes

Define digital patterns with up to 1 million segments and play them once, N times, or with indefinite repetition.

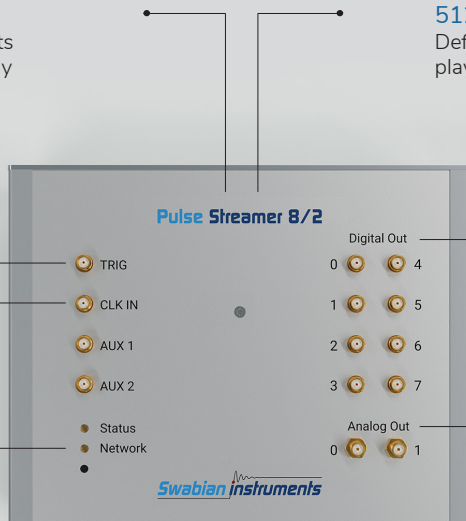

8 digital outputs

Generate complex digital patterns with 1 ns timing resolution.

2 analog outputs

Generate arbitrary waveforms with 14 bit vertical resolution and 8 ns timing resolution.

Digital output

output channels	8 x SMA
sampling rate	1 GSa/s
voltage levels (into 50 Ω)	0 and 2.6 V
rise and fall time (20%-80%)	< 300 ps
minimum pulse width ¹⁾	2 ns
RMS jitter	< 50 ps

Analog output

output channels	2 x SMA
sampling rate	125 MSa/s
voltage range	-1.0 to 1.0 V
bandwidth (-3 dB)	50 MHz
resolution	14 bit
offset error	< 2 mV
gain error	< 1%
rise and fall time (20%-80%)	< 7 ns
step response overshoot (typ.)	25 %
output settling time (1%)	< 100 ns

¹⁾ a nominal 1 ns pulse with rising edge first will output an approx. 1 ns wide pulse; a nominal 1 ns wide pulse with falling edge first will output no pulse (see typical pulse response figures below)

²⁾ a trigger-to-data jitter below 100 ps can be achieved with an external sampling clock and a synchronous trigger (see Documentation for details)

Pattern generation

max. pattern length	1 M pulses
repeat modes	1, N, infinite
trigger modes	external, internal

Trigger input

max. voltage range (no damage)	-0.3 to 5.3 V
voltage range	0 to 5 V
trigger level	0.5 V
minimum pulse width	5 ns
trigger-to-data delay (typ.)	65 ns
trigger-to-data jitter ²⁾	±4 ns

External clock input


coupling	AC
amplitude	0.2 to 5 Vpp
frequency	10 MHz ref. clock or 125 MHz sample clock

General parameters


data interface	Ethernet (1 Gbit/s)
size (L x W x H) in mm	185 x 145 x 65

Specification values are given for hardware version 3.1, the values for older hardware may differ.



Typical pulse response (digital output)

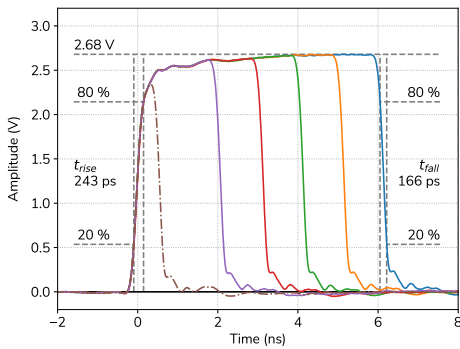

Typical pulse response (analog output)

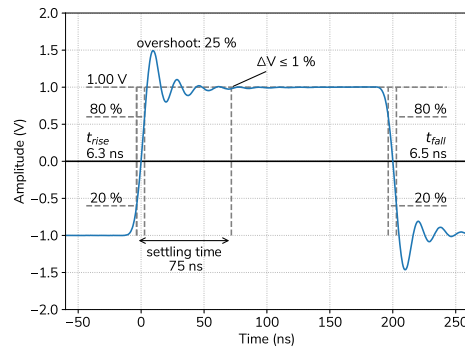

Waveform examples (analog output)

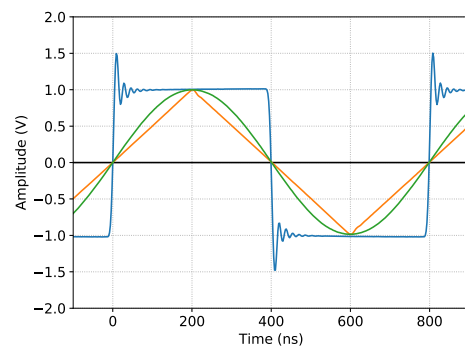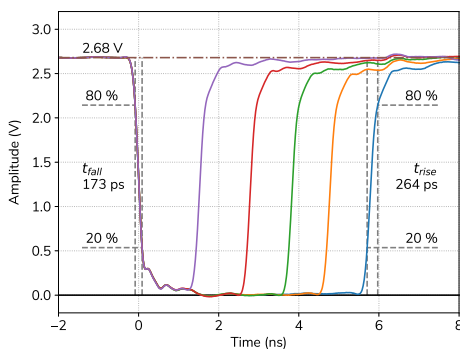

Алматы (7273)495-231	Калининград (4012)72-03-81	Омск (3812)21-46-40	Сыктывкар (8212)25-95-17
Ангарск (3955)60-70-56	Калуга (4842)92-23-67	Орел (4862)44-53-42	Тамбов (4752)50-40-97
Архангельск (8182)63-90-72	Кемерово (3842)65-04-62	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Киров (8332)68-02-04	Пенза (8412)22-31-16	Тольятти (8482)63-91-07
Барнаул (3852)73-04-60	Коломна (4966)23-41-49	Петрозаводск (8142)55-98-37	Томск (3822)98-41-53
Белгород (4722)40-23-64	Кострома (4942)77-07-48	Псков (8112)59-10-37	Тула (4872)33-79-87
Благовещенск (4162)22-76-07	Краснодар (861)203-40-90	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Красноярск (391)204-63-61	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Курск (4712)77-13-04	Рязань (4912)46-61-64	Улан-Удэ (3012)59-97-51
Владикавказ (8672)28-90-48	Курган (3522)50-90-47	Самара (846)206-03-16	Уфа (347)229-48-12
Владимир (4922)49-43-18	Липецк (4742)52-20-81	Саранск (8342)22-96-24	Хабаровск (4212)92-98-04
Волгоград (844)278-03-48	Магнитогорск (3519)55-03-13	Санкт-Петербург (812)309-46-40	Чебоксары (8352)28-53-07
Вологда (8172)26-41-59	Москва (495)268-04-70	Саратов (845)249-38-78	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Мурманск (8152)59-64-93	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Набережные Челны (8552)20-53-41	Симферополь (3652)67-13-56	Чита (3022)38-34-83
Иваново (4932)77-34-06	Нижегород (831)429-08-12	Смоленск (4812)29-41-54	Якутск (4112)23-90-97
Ижевск (3412)26-03-58	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31	Ярославль (4852)69-52-93
Иркутск (395)279-98-46	Ноябрьск (3496)41-32-12	Ставрополь (8652)20-65-13	
Казань (843)206-01-48	Новосибирск (383)227-86-73	Сургут (3462)77-98-35	
	Киргизия (996)312-96-26-47	Россия (495)268-04-70	Казахстан (772)734-952-31